


Firmware Upgrade Procedure

Time Lapse Camera TLC100


version EN A1

Please follow below steps to upgrade your Brinno Time Lapse Camera:


Step 1 Ensure your Time Lapse Camera is powered down and remove USB flash drive from the camera. Then insert the USB flash drive into your computer.

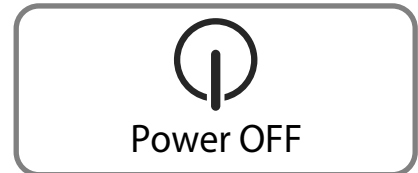

Step 2 Copy and save the file: **fw_TLC100.ldr** into **100TLC** folder in the USB flash drive (100TLC folder should locate in the **DCIM** folder)
**** If your USB flash drive doesn't have a folder named 100TLC in the DCIM folder, please create those folders by yourself!**

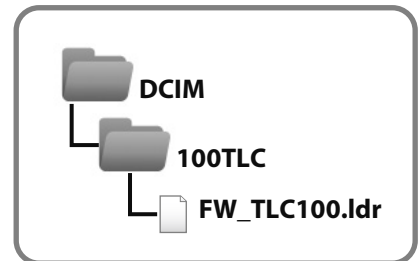


Step 3 Insert the USB flash drive into the Time Lapse Camera.

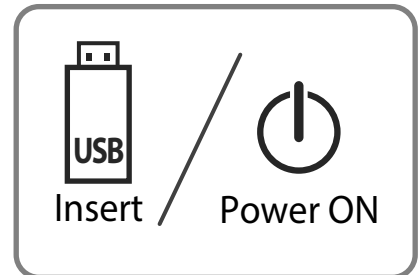

Step 4 Power on the Time Lapsed Camera.

Step 5 After the upgrade tool has fully loaded, you will see Green, Red and Blue led lights flash, it means that the camera is updating firmware. **Please do not power off camera once led lights begin flashing!**

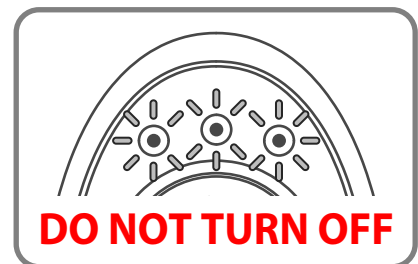

DO NOT TURN OFF

Done Once the led lights stop flashing and turn off, the firmware update is completed the upgrade.
**** The firmware will be removed automatically once the update is completed.**



Finished



Please **DO NOT** push the power button/ turn off camera or remove USB flash drive once the lights begin flashing.
That will damage the camera!