

Firmware Upgrade Procedure

Time Lapse Camera TLC120

version EN A1

Please unzip the firmware upgrade package and follow the steps below.

Step 1 Ensure your Time Lapse Camera is powered down and remove the SD card from the camera. Then insert the SD card into your computer.



Step 2 Copy and save the file **TLC120FW.BIN** into the **120TLC00** folder in the SD card (120TLC00 folder should be in the **DCIM** folder)

** If your SD card doesn't have a folder named 120TLC00 in the DCIM folder, please create please create the folders as pictured.



Step 3 Insert the SD card into the Time Lapse Camera.



Step 4 Power on the Time Lapse Camera.

Step 5 **5-1** The **Green** LED turns on and the **Orange** LED blinks for 2 seconds for 2 seconds (Camera boots up)



5-2 The **Orange** LED blinks for about 10 seconds (Firmware upgrade)



5-3 The **Green** LED is on and then the **Orange** LED blinks for 2 seconds (Upgrade completed, camera restart)




Done Once complete, please connect your device to verify the upgrade was successful.



HOW TO CHECK THE FIRMWARE VERSION?

1. Open the Brinno Camera app
2. Go to Menu Settings
3. Go to General Settings
4. Scroll down to verify Camera version

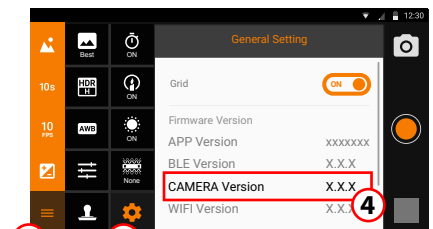

1

2

3

4



Please do not TURN OFF power or REMOVE SD card when camera is updating firmware doing so will damage the camera